



RA12-100 (12V100Ah)

RA series is a general purpose battery with 10 years design life in float service. It meets with IEC, JIS and BS standards. With up-dated AGM valve regulated technology and high purity raw materials, the RA series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, medical equipment, emergency light and security system applications.



Specification

| | |
|--|---|
| Cells Per Unit | 6 |
| Voltage Per Unit | 12 |
| Capacity | 100Ah@10hr-rate to 1.80V per cell @25°C |
| Weight | Approx.30.0 Kg(Tolerance $\pm 2\%$) |
| Max. Discharge Current | 1000A (5 sec) |
| Internal Resistance | Approx. 5m Ω |
| Operating Temperature Range | Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C |
| Normal Operating Temperature Range | 25°C $\pm 5^\circ\text{C}$ |
| Float charging Voltage | 13.6 to 13.8 VDC/unit Average at 25°C |
| Recommended Maximum Charging Current Limit | 30 A |
| Equalization and Cycle Service | 14.6 to 14.8 VDC/unit Average at 25°C |
| Self Discharge | RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using. |
| Terminal | Terminal F5/F12 |
| Container Material | A.B.S. UL94-HB, UL94-V0 Optional. |



MH28539



G4M20206-0910-E-16



CERTIFICATE

Postcode: 421001
is in conformity with
ISO 14001:2004 Standard




CERTIFICATE


Postcode: 421001
is in conformity with
OHSAS 18001:1999 Standard

Dimensions


Unit: mm Dimension: 328(L) \times 172(W) \times 222(H)

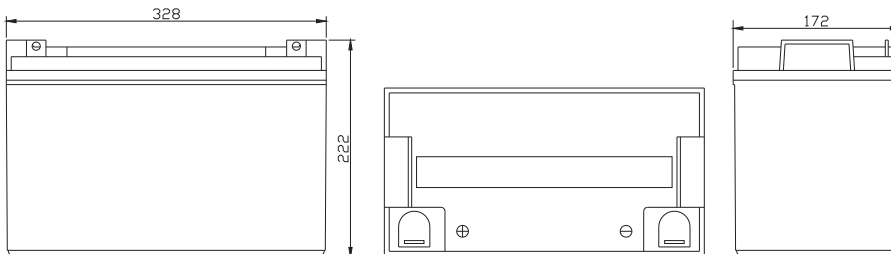

Terminal F12



Terminal F5



Constant Current Discharge Characteristics: A (25°C)

| F.V/Time | 5MIN | 10MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| 9.60V | 320.7 | 226.9 | 181.4 | 112.7 | 65.00 | 38.89 | 26.88 | 22.03 | 18.03 | 12.42 | 10.50 | 5.78 |
| 10.0V | 311.4 | 215.8 | 177.7 | 110.8 | 64.70 | 38.60 | 26.78 | 21.93 | 17.93 | 12.32 | 10.40 | 5.67 |
| 10.2V | 302.2 | 208.2 | 174.9 | 109.8 | 64.10 | 38.31 | 26.57 | 21.83 | 17.82 | 12.22 | 10.30 | 5.57 |
| 10.5V | 271.3 | 192.1 | 166.5 | 107.1 | 63.50 | 38.02 | 26.47 | 21.62 | 17.61 | 12.12 | 10.20 | 5.46 |
| 10.8V | 244.9 | 175.2 | 153.5 | 102.4 | 62.00 | 37.33 | 25.75 | 21.11 | 17.29 | 11.92 | 10.10 | 5.36 |
| 11.1V | 209.1 | 156.6 | 137.7 | 95.91 | 58.90 | 35.68 | 24.62 | 20.09 | 16.55 | 11.41 | 9.80 | 5.04 |

Constant Power Discharge Characteristics: W(25°C)

| F.V/Time | 5MIN | 10MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 9.60V | 3317 | 2416 | 1996 | 1284 | 751.1 | 458.4 | 319.9 | 262.6 | 215.1 | 148.3 | 125.5 | 69.26 |
| 10.0V | 3251 | 2342 | 1964 | 1269 | 749.3 | 456.0 | 320.0 | 262.3 | 214.6 | 147.6 | 124.7 | 68.06 |
| 10.2V | 3214 | 2280 | 1941 | 1260 | 743.5 | 453.3 | 318.6 | 261.7 | 213.9 | 146.6 | 123.6 | 66.80 |
| 10.5V | 2926 | 2123 | 1852 | 1230 | 736.8 | 450.0 | 317.4 | 259.3 | 211.3 | 145.4 | 122.4 | 65.54 |
| 10.8V | 2665 | 1957 | 1712 | 1179 | 723.2 | 444.2 | 308.7 | 253.4 | 207.5 | 143.0 | 121.2 | 64.28 |
| 11.1V | 2341 | 1770 | 1541 | 1108 | 692.3 | 427.7 | 295.4 | 241.1 | 198.6 | 136.9 | 117.6 | 60.50 |


All mentioned values are average values (Tolerance $\pm 2\%$).

RA12-100


12V100Ah



Effect of temperature on long term float life

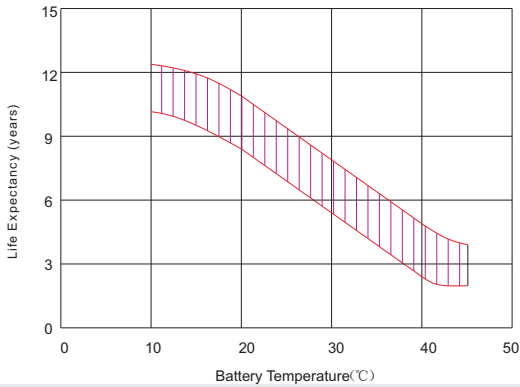

Storage characteristic

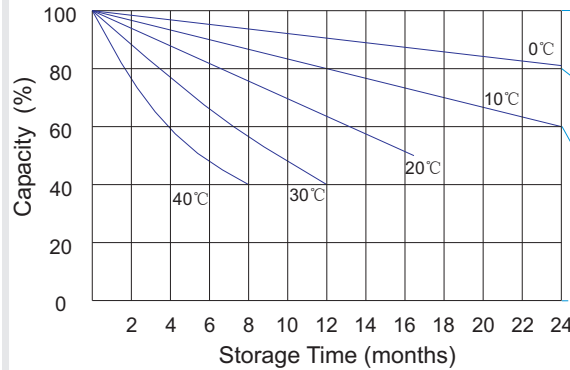


Supplementary charge required (Carry out supplementary charge before use if 100% capacity is required)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.


Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this state is reached

Supplementary charge and storage guidelines

Charge characteristic Curve for standby use

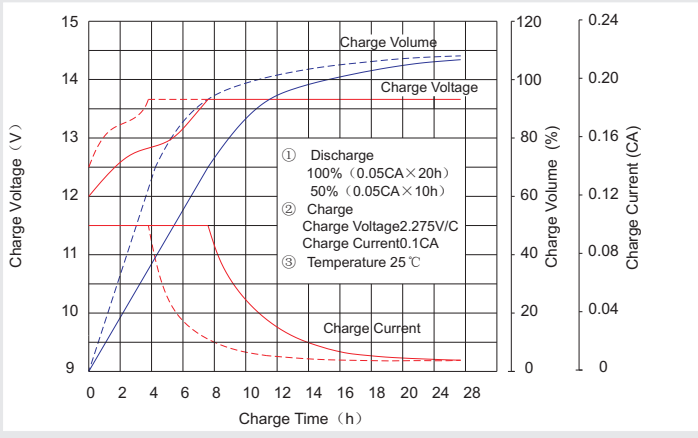

Discharge characteristic Curve

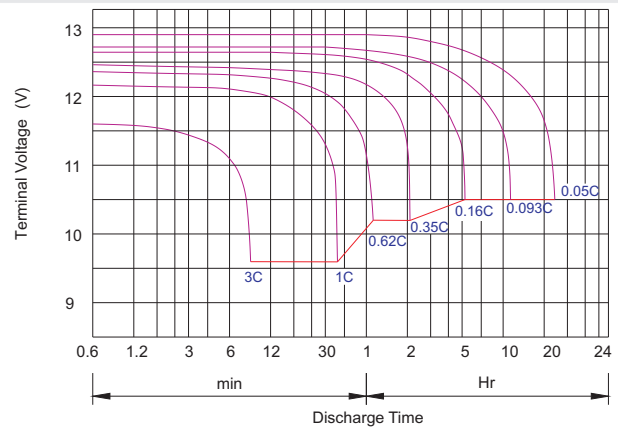

Capacity Factors With Different Temperature

| Battery Type | | -20°C | -10°C | 0°C | 5°C | 10°C | 20°C | 25°C | 30°C | 40°C | 45°C |
|--------------|--------|-------|-------|-----|-----|------|------|------|------|------|------|
| GEL Battery | 6V&12V | 50% | 70% | 83% | 85% | 90% | 98% | 100% | 102% | 104% | 105% |
| | 2V | 60% | 75% | 85% | 88% | 92% | 99% | 100% | 103% | 105% | 106% |
| AGM Battery | 6V&12V | 46% | 66% | 76% | 83% | 90% | 98% | 100% | 103% | 107% | 109% |
| | 2V | 55% | 70% | 80% | 85% | 92% | 99% | 100% | 104% | 108% | 110% |

Discharge Current VS. Discharge Voltage

| | | | |
|--------------------------------|------------|-------------------|------------|
| Final Discharge Voltage V/cell | 1.75V | 1.70V | 1.60V |
| Discharge Current (A) | (A) ≤ 0.2C | 0.2C < (A) < 1.0C | (A) ≥ 1.0C |

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

| | |
|------------------|--|
| Constant Voltage | -0.2Cx2h+14.4-14.7Vx24h, Max. Current 0.3C |
| Constant Current | -0.2Cx2h+0.1Cx12h |
| Fast | -0.2Cx2h+0.3Cx4h |

| | | | |
|----------|-----------------------|------------------|-----------------------|
| Bolt | M5 | M6 | M8 |
| Terminal | F3 F4 F13 F18 T25 T26 | F8 F11 F12-1 F15 | F5 F9 F10 F12 F14 F16 |
| Torque | 6~7N·m | 8~10N·m | 10~12N·m |

Maintenance & Cautions

Float Service:

※ Every month, recommend inspection every battery voltage.

※ Every three months, recommend equalization charge for one time.

Equalization charge method:

Discharge: 100% rate capacity discharge.

Charge: Max. current 0.3CA, constant voltage 14.4-14.7V charge 24h.

※ Effect of temperature on float charge voltage: -3mV/°C/Cell.

※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.